


鋼管用

MTB

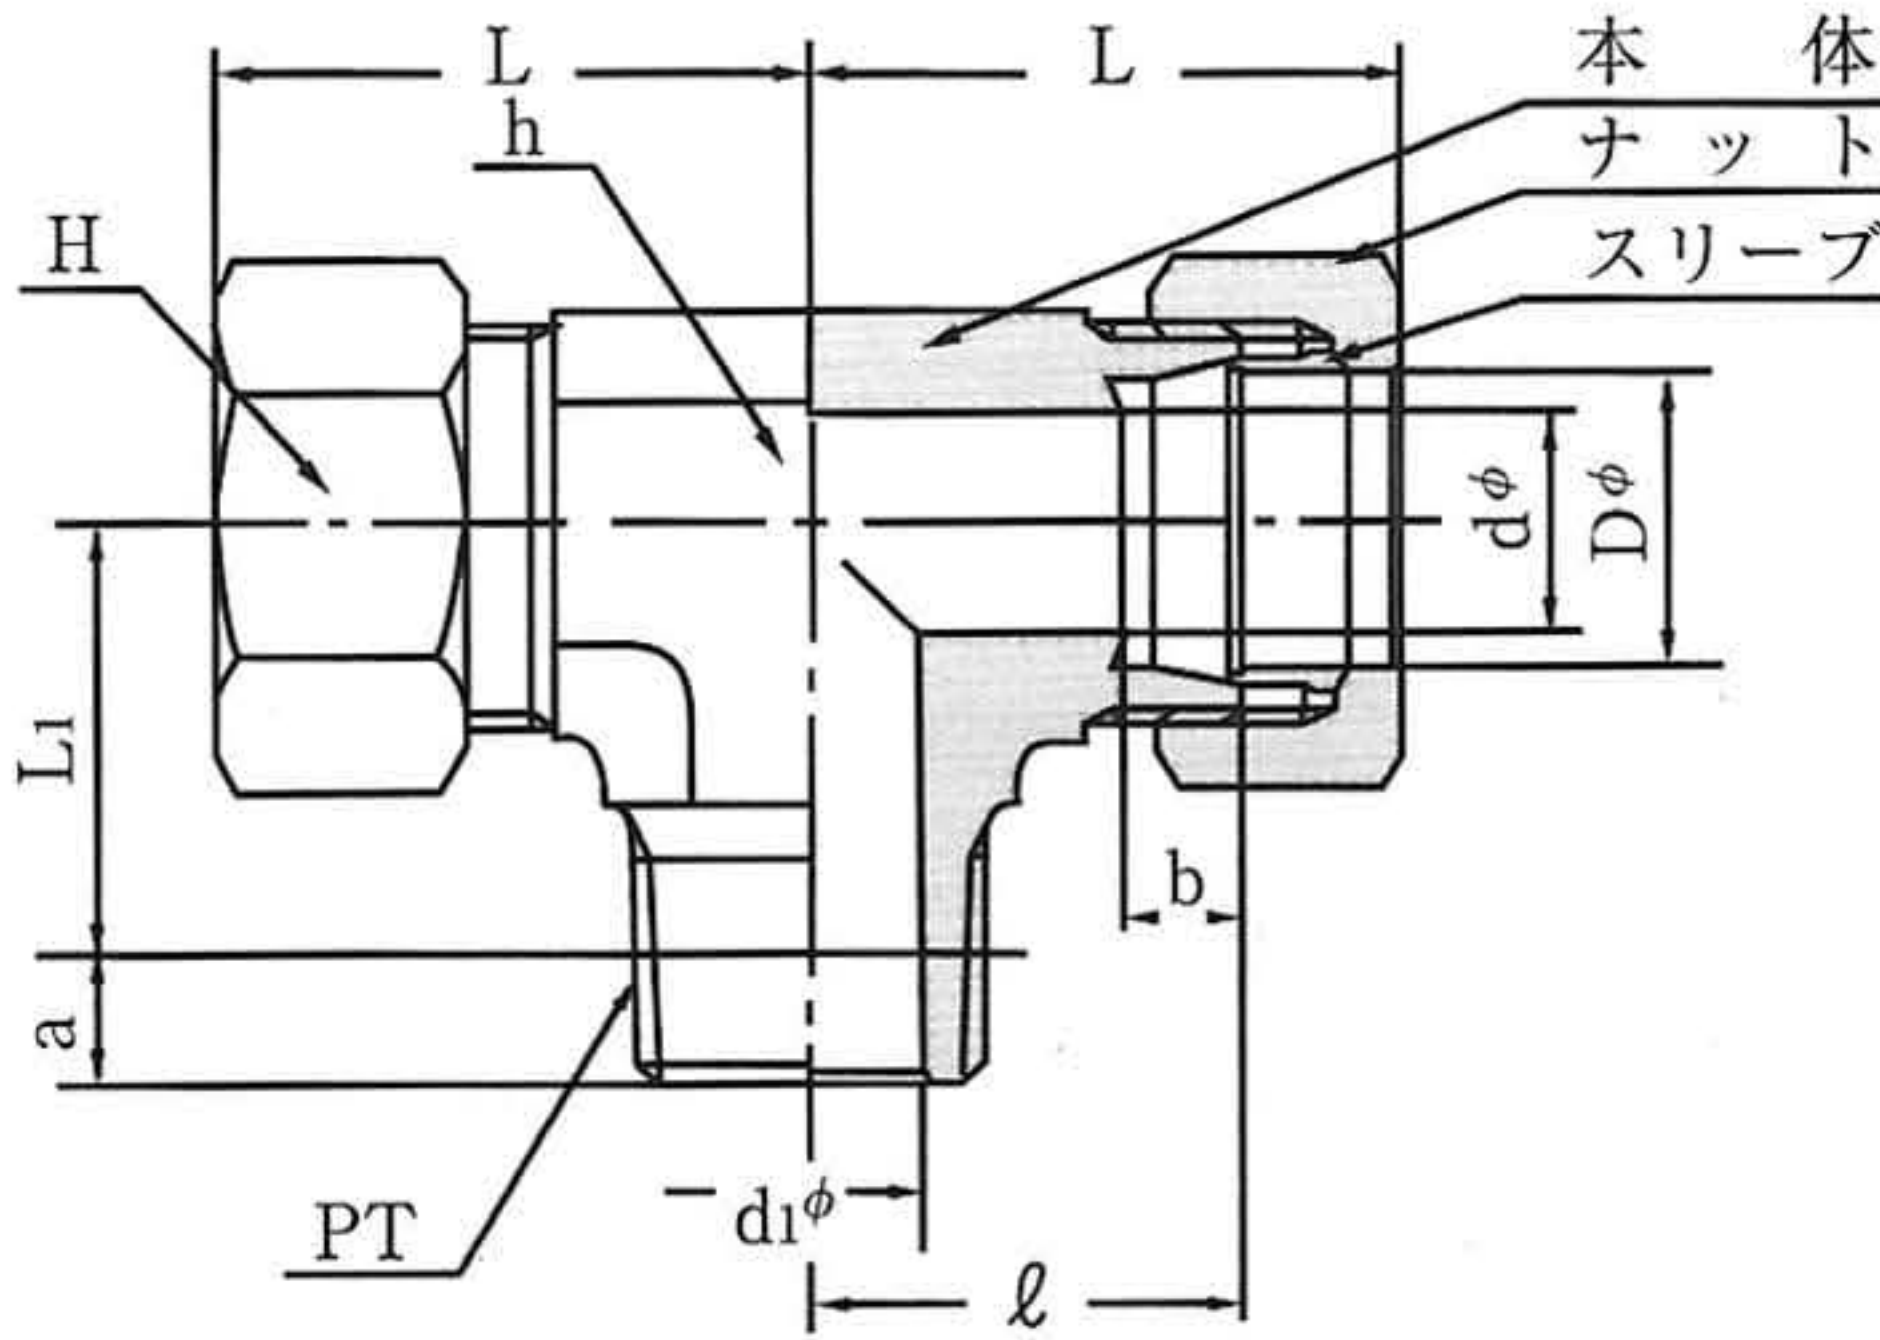

単位：mm

継手の呼び方	適用する 管の外径 D		d	d1	基準径 の位置 a	二面 巾 h	六角 対辺 H	b	l	(約)	(約)	PT
	呼び	外径								L	L1	
MTB 6-PT 1/8	6	6	4	4	3.97	14	14	7	20	30.5	14	1/8
MTB 6-PT 1/4	6	6	4	4	3.97	14	14	7	20	30.5	18	1/4
MTB 8-PT 1/8	8	8	6	4	3.97	17	17	7	23	33.5	16	1/8
MTB 8-PT 1/4	8	8	6	7	6.01	17	17	7	23	33.5	18	1/4
MTB 8-PT 3/8	8	8	6	9	6.35	19	17	7	23	33.5	19.5	3/8
MTB 10-PT 1/4	10	10	8	7	6.01	17	19	7	23	34.5	19	1/4
MTB 10-PT 3/8	10	10	8	9	6.35	19	19	7	24	35.5	19.5	3/8
MTB 12-PT 1/4	12	12	10	7	6.01	19	22	7	24	35.5	18	1/4
MTB 12-PT 3/8	12	12	10	9	6.35	19	22	7	24	35.5	20.5	3/8
MTB 15-PT 3/8	15	15	12	9	6.35	24	27	7.5	29	41.5	23.5	3/8
MTB 15-PT 1/2	15	15	12	12	8.16	24	27	7.5	29	41.5	26	1/2
MTB 16-PT 1/2	16	16	13	12	8.16	27	30	7.5	32	44.5	27	1/2
MTB 18-PT 3/8	18	18	14	9	6.35	27	32	8	32	44.5	30	3/8
MTB 18-PT 1/2	18	18	14	12	8.16	27	32	8	32	44.5	30	1/2
MTB 20-PT 3/4	20	20	17	16	9.53	30	36	8	33	45.5	30.5	3/4
MTB 22-PT 1/2	22	22	18	12	8.16	32	36	9	34	46.5	32.5	1/2
MTB 22-PT 3/4	22	22	18	16	9.53	32	36	9	34	46.5	32.5	3/4
MTB 25-PT 1	25	25	20	22	10.39	36	41	10	36	49.5	35.5	1
MTB 28-PT 1	28	28	22	22	10.39	41	46	10	41	55	39.5	1
MTB 30-PT 1	30	30	25	22	10.39	41	46	10	41	55.5	39.5	1
MTB 1/8-PT 1/4	1/8	10.5	8	7	6.01	17	19	7	23	34.5	19	1/4
MTB 1/4-PT 3/8	1/4	13.3	11	9	6.35	22	24	7.5	28	40	22.5	3/8
MTB 3/8-PT 1/2	3/8	17.3	14	12	8.16	27	32	8	32	44.5	30	1/2
MTB 1/2-PT 3/4	1/2	21.7	18	16	9.53	32	36	9	34	46.5	32.5	3/4
MTB 3/4-PT 1	3/4	27.2	22	22	10.39	36	41	10	41	49.5	35.5	1

(但し、素材の都合に依り多少寸法が変わることがあります。)